



ThermoGrip® H1926A

HOT MELT ADHESIVE

KEY FEATURES

- Aggressive hot tack for excellent pick-up
- Alternative raw material slate for optimal supply security
- Good thermal stability for open pot applications

PRODUCT

H1926A is a hot melt labeling adhesive.

DESCRIPTION

H1926A has aggressive hot tack that offers excellent and reliable pick-up in non-permanent roll through applications. It is formulated with a different raw material slate for optimal supply security while offering good thermal stability for open pot applications.

BASIC USES

H1926A is designed for superior performance in labeling to three piece metal cans.

PACKAGING

H1926A is available in an easy to use Pick-et™ form.

CLEAN UP

Mineral oil or paraffin wax, not to exceed flash point as stated on the SDS, followed by a thorough purge with the adhesive itself.

FDA 21 CFR NUMBERS

175.105. We do not knowingly add any substances derived from animal sources to this product.

SHELF LIFE

Can be stored 730 days in a clean dry place, in its original package at an average temperature of 25°C or below. Storage temperature should not exceed 40°C.

HEALTH AND SAFETY PRECAUTIONS

The Safety Data Sheet should be consulted for proper handling, clean up, and spill containment before use. Keep containers covered to minimize contamination. For FDA




PAPER LABELS

NON-PERMANENT

TYPICAL PHYSICAL PROPERTIES

Description	Results
Thermosel Viscosity (Brookfield ASTM D3236)	2000 cP @ 200°F (93°C)
	650 cP @ 225°F (107°C)
	300 cP @ 250°F (121°C)
	150 cP @ 275°F (135°C)
Density	0.98 g/cc @ 77°F (25°C)
Ball and Ring Softening Point (Herzog ASTM E28)	150°F (66°C)
Suggested Running Temperature	225-275°F (107-135°C)

VISCOSITY CURVE

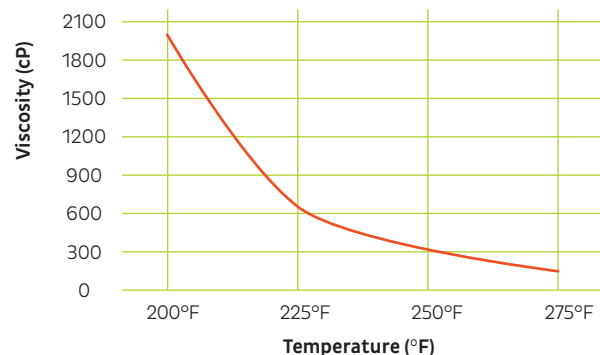

regulations and additional clearances, please contact the Regulatory Affairs Department at 414-774-2250.

LIMITED WARRANTY

Limited Warranty found at www.bostik-us.com or call 800-726-7845. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. UNLESS OTHERWISE STATED IN THE LIMITED WARRANTY, THE SOLE REMEDY FOR BREACH OF WARRANTY IS REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW. DISCLAIMERS OF IMPLIED WARRANTIES MAY NOT BE APPLICABLE TO CERTAIN CLASSES OF BUYERS AND SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. It is the buyer's obligation to test the suitability of the product for an intended use prior to using it. The Limited Warranty extends only to the original purchaser and is not transferable or assignable. Any claim for a defective product must be filed within 30 days of discovery of a problem, and must be submitted with written proof of purchase.

BOSTIK HOTLINE

Smart help
1-800-726-7845

Bostik, Inc.
11320 W Watertown Plank Road
Wauwatosa, WI 53226
www.bostik-us.com

This document supersedes all previously published literature.
10.23.14

