


GMP 050 Spray



Equipment Solutions

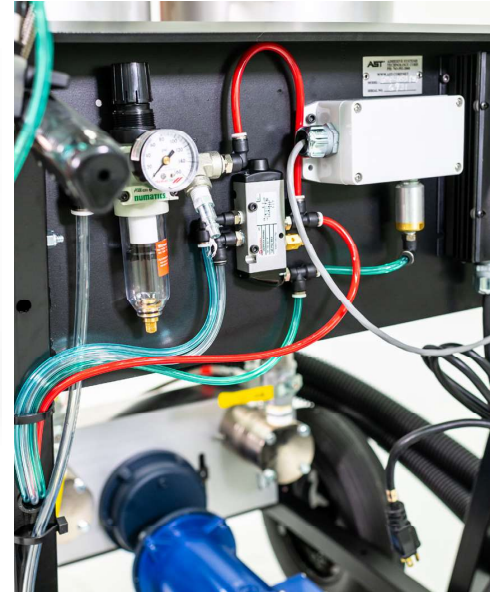

Portable, Reliable, Rugged Design

Your metering and mixing solution for small spray applications.

BENEFITS

- Better dispensing control
- Ideal for Polyureas, unfilled Urethanes and Epoxies
- Operator-controlled air purge
- Low-pressure, ambient-temperature spray
- Low overspray

SPECIFICATIONS

Dimensions: 36" L x 30" W x 44" W (200 lbs.)

Motor: 1/2 HP drive, 90 volt

Ratio Range: 1:1 to 4:1


Tank Size: 2 stainless steel, each 8.5 gallons

Viscosity Range: 100 CPS to 7,500 CPS

Services Required: 120 V./15 AH, 5 AMP, 90 psi, 6 cfm

Volume Output: Up to 0.4 gpm

Pump: 2 APPLIED Gerotor pumps with external lubrication

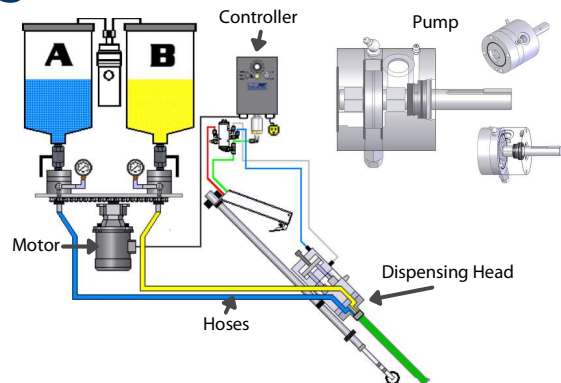

NORTH AMERICA BASED. CUSTOMER FOCUSED.

With 25+ locations across the continent, APPLIED offers a stronger supply chain, localized sales reps, and shorter delivery times. We combine groundbreaking adhesive and sealant solutions with industry-leading expertise and the highest-quality dispensing equipment. Since 1971, APPLIED directly manages every step of the process giving our customers turnkey solutions with lower overhead. It also provides a strategic advantage by avoiding issues related to importing from overseas, eliminating tariff surprises and international shipping delays.

Your custom adhesive solutions provider.



Visit us at
appliedadhesives.com



Call us today
(763) 592-2063



6035 Baker Road
Minnetonka, MN 55345



construction@
appliedproducts.com